

## High Pressure Sodium Lamps

Description: HPSE 100W/E40/HO

### Performance Data


Rated Light Output (Lumens @ 100 hours)	10000
Lamp Lumens per Watt	100
Rated Life (Hrs @ 10Hr./Start)	28000+
Correlated Colour Temperature (K)	2000
Chromaticity (CIE - X Y)	535,420
Colour Rendering Index (CRI) or (Ra)	20
Typical Warm Up Time (Minutes)	4
Typical Hot Restart Time (Minutes)	1
Burning Position	Universal
Energy Rating (ErP)	A+ 110 kWh/1000h

### Physical Data


Base Designation	E40
Bulb Designation	E90
Bulb Diameter (mm)	76
Max. Overall Length (mm)	186
Max. Base Temperature (°C)	250
Max. Bulb Temperature (°C)	400
Luminaire Type	Open/Enclosed
Socket Pulse Rating (KV)	5
Mercury Content (mg)	5

### Lamp Electrical Data

Nominal Lamp Wattage (W)	100
Lamp Operating Voltage (V)	100
Lamp Operating Current (A)	1.2
Min. Open Circuit Voltage (RMS)	198
Min. Starting Pulse (Peak V)	3800-4500
Min. Pulse Width (Microseconds)	1
Min. Pulse Rate Per ½ cycle	1
Pulse Position (Electrical Degrees)	60-90, 240-270

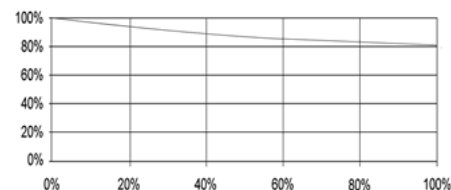

Lumen Maintenance (Light Output vs. Rated Life)

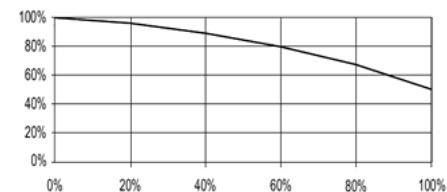

Lamp Mortality (Survivors vs. Rated Life)

Revision: 28-02-2012

\*\*See page 2 for product notes\*\*

## High Pressure Sodium Lamps

### Notes:

This Product Specification contains data about typical performance at nominal power. Actual values may depend on ballast and applications. Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives.