

# 250 Watt Pulse Start Lamp


# 25028 DATA SHEET

UNIFORM® PULSE START METAL HALIDE LIGHTING SYSTEMS




**VENTURE**  
LIGHTING

**UNI-FORM**  
PULSE START METAL HALIDE LIGHTING SYSTEMS



**Universal**  
Any Position

**ED28**



Dia. = 3.5" (90mm)  
MOL = 8.3" (211mm)  
LCL = 5.0" (127mm)  
Base = Mogul (EX39)

## MP 250W/U/UVS/PS/740

### GENERAL Characteristics

Lamp Type	MH Pulse Start Single Ended
ANSI Code	M138, M153/0
Bulb Shape	ED28
Base Type	Mogul (EX39)
Bulb Finish	Clear
Rated Life (V)	20000 hours
Rated Life (H)	15000 hours
Operating Position	Universal

### PHOTOMETRIC

Initial Lumens / LPW (V)	23800 / 95
Initial Lumens / LPW (H)	21500 / 86
Lamp Lumen Depreciation (LLD)	.86 (86%) @ 8000 hours
Correlated Color Temperature	4000K
Chromaticity Coordinates (CIE-x,y)	.385 .390
Color Rendering Index (CRI) $R_a$	68

### PHYSICAL

Bulb Diameter	3.5" (90mm)
Max. Overall Length (MOL)	8.3" (211mm)
Light Center Length (LCL)	5.0" (127mm)
Effective Arc Length	29.7mm
Max. Base Temperature (°C)	210
Max. Bulb Temperature (°C)	400
Socket Pulse Rating (KV)	4
Luminaire Type	Open / Enclosed Rated

### ELECTRICAL

Lamp Watts	250
Lamp Oper. Voltage (Nom.)	133
Dimming	125 Watts, min*


### SUSTAINABILITY

Recycling Program	Smartpac® 800-451-2606
Mercury Amount (mg)	19.3
Picograms of Hg per Mean Lumen Hour	47 (V) 70 (H)


### NOTES

- Lamp performance ratings published in this data sheet are based upon operation with approved electronic ballasts.
- Nominal color temperature rating is based on Vertical ( $\pm 15^\circ$ ) operation of the lamp. Off-vertical positions will result in higher color temperature.
- UV Shield eliminates nearly all UV emissions, reducing color fading and lens yellowing.
- Product may contribute towards satisfying MR-Credit 4 under LEED.
- Minimum Starting Temperature:  $-40^\circ\text{C}/^\circ\text{F}$ .
- \* At minimum ANSI ballast input voltage.


### Spectral Distribution

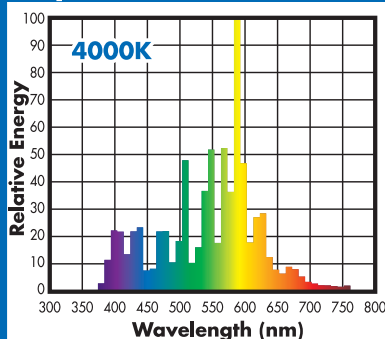

### Lumen Maintenance

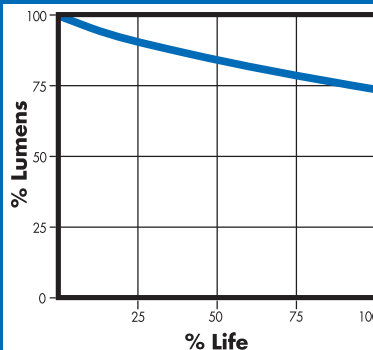

### Lamp Mortality

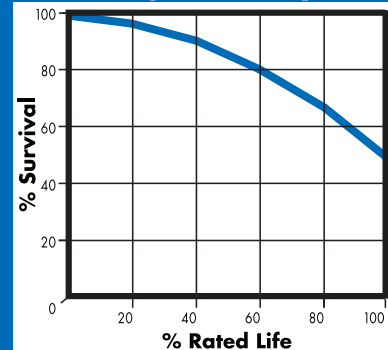

**(800) 451-2606**

Fax: (800) 451-2605

2451 Enterprise Parkway East  
Twinsburg, Ohio 44087 USA

E-mail: [venture@adlt.com](mailto:venture@adlt.com)

**VentureLighting.com**

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30  
Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

**Warning:** This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.

This Product is Recyclable Through  Smartpac®  
WAP RECYCLING SERVICE